

TECHNICAL FILE:

Switches (2-way, crossing & two pole)



1.- Technical specifications

Rated voltage: 230 V ~

Rated current: 10 AX

Manufactured according CEI 60.669-1 standard

Flush mounting in universal box according EN-60-670 standard

Screw terminals (accepts from 1 mm² to 2.5 mm² cross section cable)

Earth terminal M4 screw



2.- Material characteristics

Body: Polyamide 66

Glow wire test: 850 °C

Terminals: Brass CuZn33

Screws: Steel CQ15. Slotted Phillips pan head. Metric thread M3.5

Toggle: Brass (chrome, antique bronze and golden finish)


Nut: Brass (chrome, antique bronze, golden)

Frame: Cast brass (Anthracite, satin nickel, graphite, golden and antique bronze finish)


3.- Certificate approvals

CE certificate


Height dimensions (size in mm)

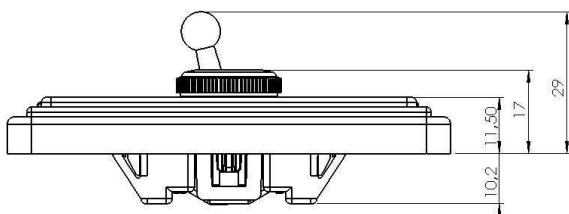


Frame dimensions (size in mm)

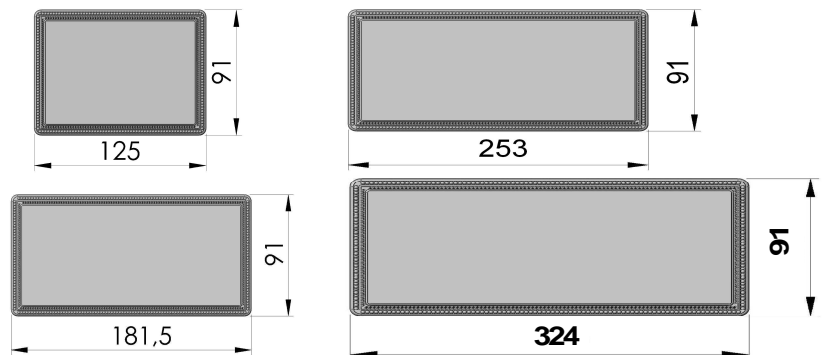


Installation diagram




One pole switch



Two-way switch Two-way switch

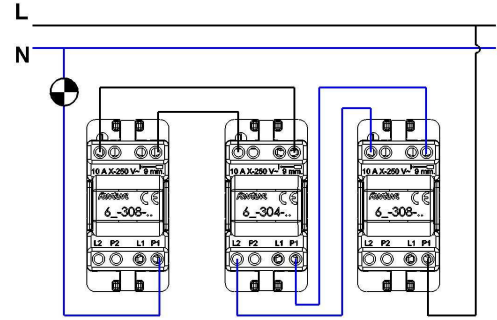

Two-way switch Crossing switch Two-way switch



Two pole switch

Supply Options

You can order different frame sizes and you can combine other mechanisms with a switch depending on the frame you choose