

TECHNICAL FILE:

R-TV-SAT OUTLET



1.- Technical specifications

<i>Frequency Margin</i>		<i>5 - 47</i>	<i>47 - 862</i>	<i>950 - 2400</i>
<i>Attenuation (dB)</i>	<i>IN -> TV Output</i>	<i><8</i>	<i>4,5±2</i>	<i>>9</i>
	<i>IN -> SAT Output</i>	<i>>8</i>	<i>>6</i>	<i>1,5±1(*)</i>
	<i>IN -> R Output</i>	<i><8</i>	<i>4,5±2</i>	<i>>9</i>
<i>Flatness (dB)</i>	<i>IN -> TV Output</i>	<i><3</i>	<i><3</i>	<i>----</i>
	<i>IN-> SAT Output</i>	<i>----</i>	<i>----</i>	<i><3</i>
<i>Output rejections (dB)</i>	<i>TV-SAT</i>	<i>>8</i>	<i>>10</i>	<i>>8</i>
	<i>TV-R</i>	<i>>8</i>	<i>>8</i>	<i>>9</i>
<i>DC Pass (mA)</i>	<i>TV Output</i>	<i>----</i>		
	<i>IF Output</i>	<i>350</i>		
	<i>R Ouput</i>	<i>----</i>		

(*) <4 dB @ 950 MHz

2.- Material characteristics

Shell: Zamak


Plate: Stainless steel, aluminium and brass.

Frame: Zamak (optional)

3.- Certificate approvals

CE certificate

Plate dimensions (size in mm)

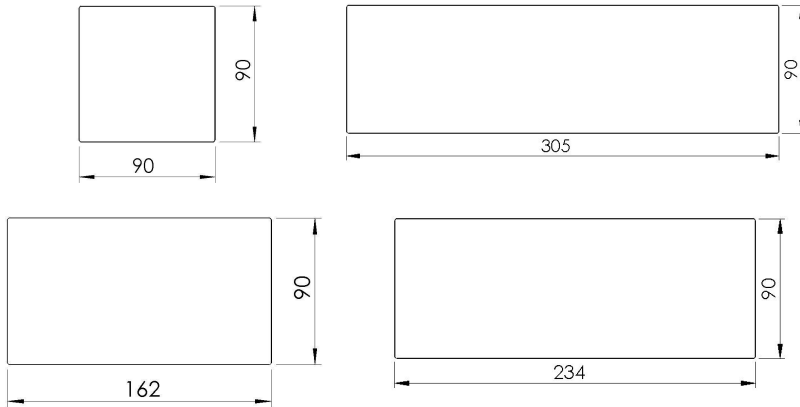

Installation diagram

